

HIGH-PERFORMANCE **PCD** ROUTER Z=2+2


FOR SIZING AND DIVIDING CUTS ON CNC ROUTER MACHINES

Item No.	Cutting Dia. Ø CD mm	CL mm	Shank Dia. Ød mm	Shank Length SL mm	OAL mm	Number of segments
SR2-12251215	12	25	12	35	75	7+1 Dia
SR2-14251620	14	25	16	60	100	5+1 Dia
SR2-14321620	14	32	16	60	100	7+1 Dia
SR2-14401620	14	40	16	50	100	8+1 Dia
SR2-16251620	16	25	16	60	100	8+1 Dia
SR2-16351618	16	35	16	50	90	8+1 Dia
SR2-18252020	18	25	20	60	100	6+1 Dia
SR2-18352019	18	35	20	50	95	8+1 Dia
SR2-18452021	18	45	20	50	105	10+1 Dia
SR2-18552025	18	55	20	50	125	12+1 Dia
SR2-20252020	20	25	20	60	100	6+1 Dia
SR2-20352019	20	35	20	55	95	8+1 Dia
SR2-20452021	20	45	20	50	105	10+1 Dia
SR2-20552520	20	55	25	60	100	12+1 Dia
SR2-20602526	20	60	25	55	130	14+1 Dia
SR2-20652526	20	65	25	55	130	14+1 Dia

* ADDITIONAL DIMENSIONS AVAILABLE ON REQUEST

* ECO TYPE AVAILABLE ON REQUEST

* IMPERIAL DIMENSIONS AVAILABLE ON REQUEST

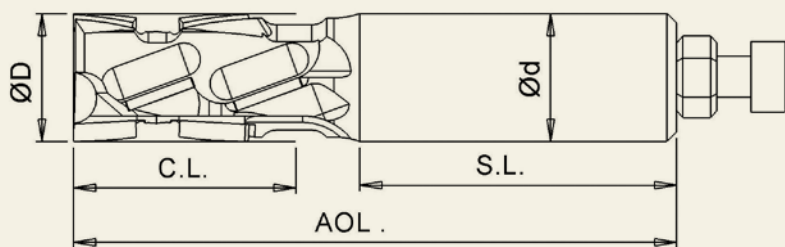

Router Z=2+2 Economy

- HIGH PERFORMANCE ROUTER FOR ROUGH AND FINISH MILLING
- SUITABLE FOR PARTING CUTS IN FULL MATERIALS
- RESHARPENABLE
- MAX RPM: 24,000

WORKPIECE MATERIAL

Hard and exotic wood, Raw partical boards, MDF,
Melamine and Paper coated panels.
High pressure laminate veneered panels,
Foil laminated materials, Glass fiber reinforced plastic.

